

## Module 5: Dictionaries II

CS 240 - Data Structures and Data Management

Sajed Haque Veronika Irvine Taylor Smith  
Based on lecture notes by many previous cs240 instructors

David R. Cheriton School of Computer Science, University of Waterloo

Spring 2017

### Dictionary ADT: Review

A *dictionary* is a collection of *key-value pairs* (KVPs), supporting operations *search*, *insert*, and *delete*.

#### Realizations

- **Unordered array or linked list:**  $\Theta(1)$  insert,  $\Theta(n)$  search and delete
- **Ordered array:**  $\Theta(\log n)$  search,  $\Theta(n)$  insert and delete
- **Balanced search trees (AVL trees):**  
 $\Theta(\log n)$  search, insert, and delete

### Self-Organizing Search

- Unordered linked list  
*search:*  $\Theta(n)$ , *insert:*  $\Theta(1)$ , *delete:*  $\Theta(1)$  (after a search)
- Linear search to find an item in the list
- Is there a more useful ordering?
- No: if items are accessed equally likely
- Yes: otherwise (we have a probability distribution for items)
- **Optimal static ordering:** sorting items by their probabilities of access in non-increasing order minimizes the expected cost of Search.
- **Proof Idea:** For any other ordering, exchanging two items that are out-of-order according to their access probabilities makes the total cost decrease.

## Optimal Static Ordering

**A list of elements ordered by non-increasing probability of access has minimum expected access cost**

- $L = \langle x_1, x_2, \dots, x_n \rangle$

Expected access cost in  $L$  is

$$E(L) = \sum_{i=1}^n P(x_i)T(x_i) = \sum_{i=1}^n P(x_i) \cdot i$$

$P(x_i)$  - access probability for  $x_i$

$T(x_i)$  - position of  $x_i$  in  $L$

- Example**

$$P(a) = 0.3 \quad P(b) = 0.5 \quad P(c) = 0.2$$

$$L = \langle a, b, c \rangle$$

$$E(L) = 0.3 + 0.5 * 2 + 0.2 * 3 = 1.9$$

$$L = \langle b, a, c \rangle$$

$$E(L) = 0.5 + 0.3 * 2 + 0.2 * 3 = 1.7$$

## Optimal Static Ordering

**A list of elements ordered by non-increasing probability of access has minimum expected access cost**

Proof by Contradiction

- $L = \langle x_1, \dots, x_k, x_{k+1}, \dots, x_n \rangle$

Suppose the access cost of  $L$  is optimal and there is  $k$  such that

$$P(x_k) < P(x_{k+1})$$

$$E(L) = P(x_k) \cdot k + P(x_{k+1}) \cdot (k+1) + \sum_{i \neq k, k+1} P(x_i) \cdot i$$

- Create another list  $L'$  by swapping  $x_k$  and  $x_{k+1}$ .

$$L' = \langle x_1, \dots, x_{k+1}, x_k, \dots, x_n \rangle$$

$$E(L') = P(x_{k+1}) \cdot k + P(x_k) \cdot (k+1) + \sum_{i \neq k, k+1} P(x_i) \cdot i$$

- $E(L') - E(L) = P(x_k) - P(x_{k+1}) < 0 \Rightarrow E(L') < E(L)$

Contradiction

## Dynamic Ordering


- What if we do not know the access probabilities ahead of time?
- Move-To-Front(MTF)**: Upon a successful search, move the accessed item to the front of the list
- Transpose**: Upon a successful search, swap the accessed item with the item immediately preceding it

**Performance of dynamic ordering:**

- Both can be implemented in arrays or linked lists.
- Transpose does not adapt quickly to changing access patterns.
- MTF Works well in practice.
- Theoretically MTF is "competitive":  
No more than twice as bad as the optimal "offline" ordering.


## Skip Lists

- **Randomized** data structure for dictionary ADT
- A hierarchy of ordered linked lists
- A **skip list** for a set  $S$  of items is a series of lists  $S_0, S_1, \dots, S_h$  such that:
  - ▶ Each list  $S_i$  contains the special keys  $-\infty$  and  $+\infty$
  - ▶ List  $S_0$  contains the keys of  $S$  in non-decreasing order
  - ▶ Each list is a subsequence of the previous one, i.e.,  $S_0 \supseteq S_1 \supseteq \dots \supseteq S_h$
  - ▶ List  $S_h$  contains only the two special keys

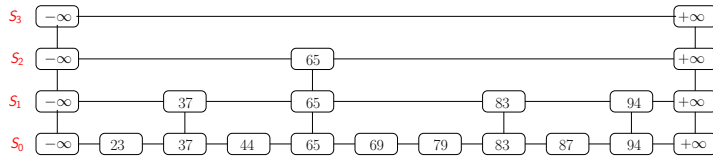

## Skip Lists

- A **skip list** for a set  $S$  of items is a series of lists  $S_0, S_1, \dots, S_h$
- A two-dimensional collection of positions: **levels** and **towers**
- Traversing the skip list:  $\text{after}(p)$ ,  $\text{below}(p)$

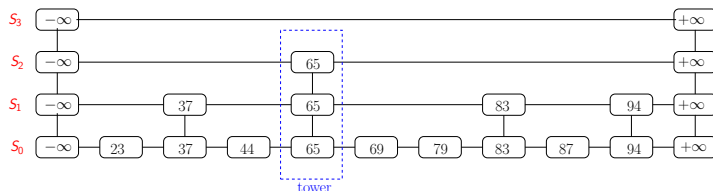

## Search in Skip Lists

*skip-search*( $L, k$ )


$L$ : A skip list,  $k$ : a key

1.  $p \leftarrow$  topmost left position of  $L$
2.  $S \leftarrow$  stack of positions, initially containing  $p$
3. **while**  $\text{below}(p) \neq \text{null}$  **do**
4.      $p \leftarrow \text{below}(p)$
5.     **while**  $\text{key}(\text{after}(p)) < k$  **do**
6.          $p \leftarrow \text{after}(p)$
7.     push  $p$  onto  $S$
8. **return**  $S$

- $S$  contains positions of the largest key **less than**  $k$  at each level.
- $\text{after}(\text{top}(S))$  will have key  $k$ , iff  $k$  is in  $L$ .
- **drop down:**  $p \leftarrow \text{below}(p)$
- **scan forward:**  $p \leftarrow \text{after}(p)$

## Search in Skip Lists

Example: Skip-Search( $S, 87$ )

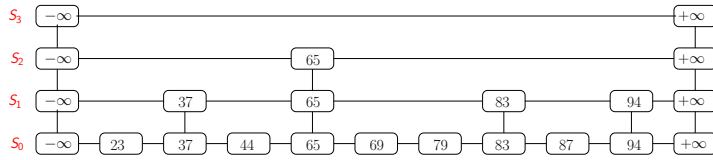


## Insert in Skip Lists

- *Skip-Insert*( $S, k, v$ )
  - ▶ Randomly compute the height of new item: repeatedly toss a coin until you get tails, let  $i$  be the number of times the coin came up heads
  - ▶ Search for  $k$  in the skip list and find the positions  $p_0, p_1, \dots, p_i$  of the items with largest key less than  $k$  in each list  $S_0, S_1, \dots, S_i$  (by performing *Skip-Search*( $S, k$ ))
  - ▶ Insert item ( $k, v$ ) into list  $S_j$  after position  $p_j$  for  $0 \leq j \leq i$  (a tower of height  $i$ )


## Insert in Skip Lists

Example: Skip-Insert( $S, 52, v$ )

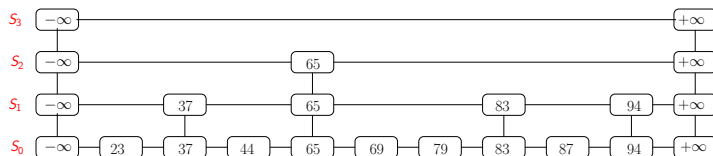

## Insert in Skip Lists

Example: Skip-Insert( $S, 100, v$ )

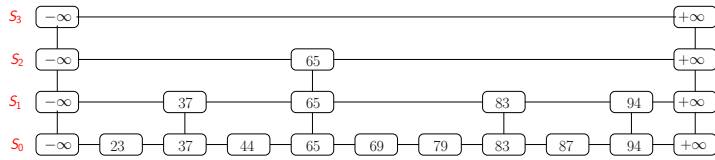


## Delete in Skip Lists

- Skip-Delete( $S, k$ )
  - ▶ Search for  $k$  in the skip list and find all the positions  $p_0, p_1, \dots, p_i$  of the items with the largest key smaller than  $k$ , where  $p_j$  is in list  $S_j$ . (this is the same as Skip-Search)
  - ▶ For each  $i$ , if  $\text{key}(\text{after}(p_i)) == k$ , then remove  $\text{after}(p_i)$  from list  $S_i$
  - ▶ Remove all but one of the lists  $S_i$  that contain only the two special keys

## Delete in Skip Lists

Example: Skip-Delete( $S, 65$ )

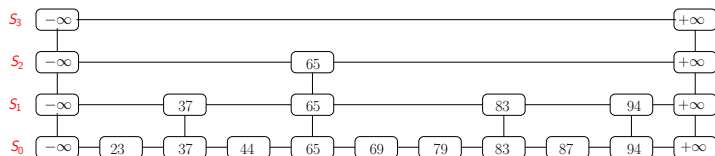

## Summary of Skip Lists

- Expected **space** usage:  $O(n)$
- Expected **height**:  $O(\log n)$   
A skip list with  $n$  items has height at most  $3 \log n$  with probability at least  $1 - 1/n^2$
- *Skip-Search*:  $O(\log n)$  expected time
- *Skip-Insert*:  $O(\log n)$  expected time
- *Skip-Delete*:  $O(\log n)$  expected time
- Skip lists are fast and simple to implement in practice